10

ļ.

		, i		514	A Rec'd	PC	T/PTO 13	ALIC 1999
U.S. A	PPLICATION To	be assigned 7433	INTERNATIONAL APP PCT/US98			<del></del>		DOCKET NUMBER -PCT USA
20. <b>BASI</b> O	The fol	lowing fees are submitted:. L FEE ( 37 CFR 1.492 (a) (1) -	(5)):	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				S PTO USE ONLY
	_	ort has been prepared by the EPO I preliminary examination fee pai		82)	\$840.0	0		
	No internation	onal preliminary examination fee onal search fee paid to USPTO (3	paid to USPTO (37 CFR 37 CFR 1 445(a)(2))	1.482)	\$670.00 ) \$760.0	Λ		
	Neither inter	rnational preliminary examination l search fee (37 CFR 1.445(a)(2)	n fee (37 CFR 1 482) nor		\$970.0			
	International	l preliminary examination fee pai as satisfied provisions of PCT Art	d to USPTO (37 CFR 1.4	.82)	\$96.00			
		ENTER APPROPRI		AM			\$670.00	
month:	s from the ear	00 for furnishing the oath or declariest claimed priority date (37 Cl	FR 1.492 (e)).	☐ 2(			\$0.00	
CL. Total c	AIMS claims	NUMBER FILED	NUMBER EXTRA 0		x \$18.0		\$0.00	
	ndent claims	- 3=	0		x \$78.0	0	\$0.00	
Multip	ple Dependen	t Claims (check if applicable).	ABOVE CALCU	TAT	TONG		\$0.00	
Reduct must a	tion of 1/2 for lso be filed (	r filing by small entity, if applica Note 37 CFR 1.9, 1.27, 1.28) (ch	ble Verified Small Entit			<u>=</u>	\$670.00 \$335.00	
				SUB'	<b>FOTAL</b>	=	\$335.00	
Process months	sing fee of \$1 s from the ear	30.00 for furnishing the English liest claimed priority date (37 Cl	FR 1.492 (f)).	□ 20		+	\$0.00	
Fee for	recording th	e enclosed assignment (37 CFR 1	TOTAL NATIO	must h	ne l	_	\$335.00	
accom	panied by an	appropriate cover sheet (37 CFR	3.28, 3.31) (check if app	olicabl	e).	=	\$0.00 \$335.00	
			TOTAL PEES E	.ICL	OSED		Amount to be: refunded	\$
							charged	\$
X D	Please char A duplicate	the amount of \$335.00  ge my Deposit Account No. e copy of this sheet is enclosed. issioner is hereby authorized to cl	to cover the above fees  in the amo	ount of		adit a	to cover the abov	/e fees.
	to Deposit A	Account No. <b>02-4377</b>	A duplicate copy of this s	sheet is	enclosed.			
NOTE 1.137(a	: Where an a) or (b)) mu	appropriate time limit under 3' st be filed and granted to restor	7 CFR 1.494 or 1.495 ha re the application to pen	s not b ding s	een met, a tatus.	petiti	on to revive (37 CF)	R
	ALL CORRE	ESPONDENCE TO:			Petto SIGNATU	ン 1 JRE	4. Busing	ev
Baker	· & Botts, LI ckefeller Pla				Peter A.	Busi	<i>∪</i> nger	
New Y	York, NY 10	112-0228			NAME			
					27,862 REGISTR	ΔΤΙΟ	N NUMBER	
					13 Augus			
					DATE		<u> </u>	

Ι


Applicant or PatentsetwEleftheriadis et al.

Serial or Patent No.: <u>09/367,433</u> Filed or Issued: <u>August 13, 1999</u>

For: OBJECT-BASED AUDIO-VISUAL TERMINAL AND BITSTREAM STRUCTURE

(37 CFR 1.9(f) and 1.27(d)) - NONPROFIT ORGANIZATION
I hereby declare that I am an official empowered to act on behalf of the nonprofit organization identified below:
NAME OF ORGANIZATION <u>The Trustees of Columbia University in the City of New York</u>
ADDRESS OF ORGANIZATION 116th Street & Broadway, New York, NY 10027
TYPE OF ORGANIZATION
[X] UNIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION [] TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE [26 USC 501(a) and 501(c)(3)) [] NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA (NAME OF STATE) (CITATION OF STATUTE) [] WOULD QUALIFY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC 501(a) and 501(c)(3)) IF LOCATED IN THE UNITED STATES OF AMERICA [] WOULD QUALIFY AS NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA (NAME OF STATE) (CITATION OF STATUTE) (CITATION OF STATUTE)
I hereby declare that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code with regard to the invention entitled OBJECT-BASED AUDIO-VISUAL TERMINAL AND BITSTREAM STRUCTURE by inventor(s) Alexandros Eleftheriadis and Hari Kalva described in
[] the specification filed herewith [X] Application Serial No. <u>09/367,433</u> , filed <u>August 13, 1999</u> . [] Patent No, issued
I hereby declare that the rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights to the invention is listed below\* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). \*Note: Separate verified statements are required from each named person, concern or organization having rights to the invention



averring to their status as small entities. (37 CFR 1.27)

NAME
ADDRESS
[] INDIVIDUAL [] SMALL BUSINESS CONCERN [] NONPROFIT ORGANIZATION
NAMEADDRESS
[] INDIVIDUAL [] SMALL BUSINESS CONCERN [] NONPROFIT ORGANIZATION
I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.
NAME OF PERSON SIGNING <u>Jack M. Granowitz</u>
TITUE IN ORGANIZATION Executive Director, Columbia Innovation Enterprise
ADDRESS OF PERSON SIGNING Columbia University, Engineering Terrace - 363, New York, NY 10027-6699
SIGNATURE Josh M. Frankley DATE 12/8/99
SIGNATURE Jack M. January DATE 12/8/99

10

15

20

25

30

09/367433 PCT/US98/02668

# 10 Rec'd PCT/PTO 1 3 AUG 1999

# OBJECT-BASED AUDIO-VISUAL TERMINAL AND BITSTREAM STRUCTURE

#### Technical Field

This invention relates to the representation, transmission, processing and display of video and audio-visual information, more particularly of object-based information.

#### Background of the Invention

Image and video compression techniques have been developed which, unlike traditional waveform coding, attempt to capture high-level structure of visual content. Such structure is described in terms of constituent "objects" which have immediate visual relevancy, representing familiar physical objects, e.g. a ball, a table, a person, a tune or a spoken phrase. Objects are independently encoded using a compression technique that gives best quality for each object. The compressed objects are sent to a terminal along with composition information which tells the terminal where to position the objects in a scene. The terminal decodes the objects and positions them in the scene as specified by the composition information. In addition to yielding coding gains, object-based representations are beneficial with respect to modularity, reuse of content, ease of manipulation, ease of interaction with individual image components, and integration of natural, camera-captured content with synthetic, computer-generated content.

#### Summary of the Invention

In a preferred architecture, structure or format for information to be processed at an object-based video or audio-visual (AV) terminal, an object-oriented bitstream includes objects, composition information, and

10

15

30

WO 98/36559 PCT/US98/02668

scene demarcation information. The bitstream structure allows on-line editing, e.g. cut and paste, insertion/deletion, grouping, and special effects.

In the preferred architecture, in the interest of ease of editing, AV objects and their composition information are transmitted or accessed on separate logical channels (LCs). The architecture also makes use of "object persistence", taking advantage of some objects having a lifetime in the decoder beyond their initial presentation time, until a selected expiration time.

#### Brief Description of the Drawing

Fig. 1 is a functional schematic of an exemplary object-based audio-visual terminal.

Fig. 2a is a schematic of an exemplary object-based audio-visual composition packet.

Fig. 2b is a schematic of an exemplary object-based audio-visual data packet.

Fig. 2c is a schematic of an exemplary compound composition packet.

Fig. 3 is a schematic of exemplary node and scene description information using composition.

Fig. 4 is a schematic of exemplary stream-node association information.

Fig. 5 is a schematic of exemplary node/graph update information using a scene.

Fig. 6 is a schematic of an exemplary audiovisual terminal design.

Fig. 7 is a schematic of an exemplary audiovisual system controller in the terminal according to Fig. 6.

Fig. 8 is a schematic of exemplary information flow in the controller according to Fig. 7.

10

15

20

25

30

# <u>Detailed Description</u>

An audio-visual (AV) terminal is a systems component which is instrumental in forming, presenting or displaying audio-visual content. This includes (but is not limited to) end-user terminals with a monitor screen and loudspeakers, as well server and mainframe computer facilities in which audio-visual information is processed. In an AV terminal, desired functionality can be hardware-, firmware- or software-implemented.

Information to be processed may be furnished to the

Information to be processed may be furnished to the terminal from a remote information source via a telecommunications channel, or it may be retrieved from a local archive, for example. An object-oriented audiovisual terminal more specifically receives information in the form of individual objects, to be combined into scenes according to composition information supplied to the terminal.

Fig. 1 illustrates such a terminal, including a de-multiplexer (DMUX) 1 connected via a logical channel LCO to a system controller or "executive" 2 and via logical channels LC1 through LCn to a buffer 3. The executive 2 and the buffer 3 are connected to decoders 4 which in turn are connected to a composer unit 5. Also, the executive 2 is connected to the composer unit 5 directly, and has an external input for user interaction, for example.

In the preferred AV architecture, the AV objects and their composition information are transmitted or accessed on separate logical channels. The DMUX receives the Mux2 layer from the lower layers and de-multiplexes it into logical channels. LCO carries composition information which is passed on to the executive. The AV objects received on other logical channels are stored in the buffer to be acted upon by the

WO 98/36559

5

10

15

20

25

30

decoders. The executive receives the composition information, which includes the decoding and presentation time stamps, and instructs the decoders and composer accordingly.

The system handles object composition packets (OCP) and object data packets (ODP). A composition packet contains an object's ID, time stamps and the "composition parameters" for rendering the object. An object data packet contains an object ID, an expiration time stamp in case of persistent objects, and object data.

Preferably, any external input such as user interaction is converted to OCP and/or ODP before it is presented to the executive. There is no need for headers in a bitstream delivered over a network. However, headers are required when storing an MPEG4 presentation in a file.

Figs. 2a and 2b illustrate the structure of composition and data packets in further detail. features are as follows:

Object ID is composed of object type and object The default length of the Object ID is 2 bytes, number. including ten bits for the object number and 6 for the object type (e.g. text, graphics, MPEG2 VOP, compound object). An extensible code is used to accommodate more than 1023 objects or more than 31 object types. following convention will be adhered to: a value of Ob111111 in the first six bits of the Object ID corresponds to 31 plus the value of the byte immediately following the ObjectID; a value of Ob11.1111.1111 in the least significant 10 bits of the Object ID corresponds to 1023 plus the value of the two bytes immediately following the Object ID (without counting the object type extension bytes, if present). The following object types

20

25

WO 98/36559 PCT/US98/02668

are defined:

	Composition Objects	(16-bit object IDs)
	0X0000	scene configuration object
	0X0001	node hierarchy specification
5	0X0002	stream-node association
	0X0003	node/scene update
	0X0004	compound object
	Object Data (object	type, 6 most significant bits)
	0b00.0010	text
10	0b00.0011	MPEG2 VOP (rectangular VOP)
		(70)

Persistent Objects (PO) are objects that should be saved at the decoder for use at a later time. An expiration time stamp (ETS) gives the life of a PO in milliseconds. A PO is not available to the decoder after ETS runs out. When a PO is to be used at a later time in a scene, only the corresponding composition information needs to be sent to the AV terminal.

Decoding Time Stamp (DTS) indicates the time an object (access unit) should be decoded by the decoder.

<u>Presentation Time Stamp</u> (PTS) indicates the time an object (access unit) should be presented by the decoder.

Lifetime Time Stamp (LTS) gives the duration (in milliseconds) an object should be displayed in a scene. LTS is implicit in some cases, e.g. in a video sequence where a frame is displayed for 1/frame-rate or until the next frame is available, whichever is larger. An explicit LTS is used when displaying graphics and text. An AV object should be decoded only once for use during its life time.

Expiration Time Stamp (ETS) is specified to support the notion of object persistence. An object, after it is presented, is saved at the decoder (cache) until a time given by ETS. Such an object can be used multiple times before ETS runs out. A PO with an expired ETS is no

10

15

20

25

30

longer available to the decoder.

Object Time Base (OTB) defines the notion of time of a given AV object encoder. Different objects may belong to different time bases. The AV terminal adapts these time bases to the local one, as specified in the MSDL VM.

Object Clock Reference (OCR) can be used if necessary to convey the speed of the OTB to the decoder. By this mechanism, OTBs can be recovered/adapted at the AV terminal.

Composition Parameters are used to compose a scene (place an object in a scene). These include displacement from the upper left comer of the presentation frame, rotation angles, zooming factors, etc.

<u>Priority</u> indicates the priority of an object for transmission, decoding, and display. MPEG4 supports 32 levels of priority. Lower numbers indicate higher priorities.

<u>Persistence Indicator</u> (PI) indicates whether an object is persistent.

<u>Continuation Indicator</u> (CI) indicates the end of an object in the current packet (or continuation).

Object Grouping facilitates operations to be applied to a set of objects with a single operation. Such a feature can be used to minimize the amount of composition information sent, as well as to support hierarchical scene composition based on independent sub-scenes. The composer manipulates the component objects as a group. The structure of a compound composition packet (CCP) is shown in Fig. 2c.

Bitstream Structure includes object composition packets for describing the composition and controlling the presentation of those packets, and object data packets that contain the data for the objects. A scene is composed by a set of composition packets. The

WO 98/36559

5

bitstream supports representation of scenes as a hierarchy by using compound composition objects (CCP), also known as node hierarchy. A CCP allows combining composition objects to create complex audio-visual scenes.

```
Object-Data Packet:
```

-.ObjectID OCR\_Flag

```
ObjectID - min (default) 10 bits
               CI and PI could be combined:
                         - begin non-persistent
                    00
                         - begin persistent
                    01
10
                    10
                         - continuation
                          - end of object
                    11
     Priority: 5 bits, present only if CI/PI is 0b00 or 0b01
     ETS: 30 bits, present if CI/Pl is 0b01
     For prediction-based video coding, VOP_type is indicated
15
     by two bits (00 (I), 01 (P), 10 (B), 11 (PB)),
     facilitating editing.
     Object_data_packet{
                                    16 bits + any extensions;
          ObjectID
                                    2 bits
          CIPI
20
          if
              (CIPI <= 1)
                                    5 bits
          Priority
           if (object type is MPEG VOP)
                          (any prediction based compression)
                                          2 bits
25
                VOP type
           if (CIPI == 1)
                                     28 bits
           ETS
           ObjectData
      }
30
           Object Composition Packet
      Object composition packet{
```

1 bit

16 bits + any extensions

```
1 bit
          Display Timers Flag
                                    30
                                        bits
          DTS
          if (OCR Flag)
               OCR
                                    30
                                        bits
          if (Display Timers_Flag) {
5
                                        bits
                                    30
               PTS
                                    28
                                        bits
               LTS
          Composition parameters;
     }
10
          Composition Parameters are defined in section 2 of
     MSDL Verification Model, MPEG N1483, Systems Working
     Draft V2.0, the disclosure of which is incorporated
     herein by reference.
     Composition parameters (
15
                                          1 bit
          visibility
                composition order
                                          5 bits
                                          2 bits
                number of motion_sets
                                          12 bits
                x delta 0
                                          12 bits
                y delta 0
20
                     (i = 1; i \le number of motion sets; i++){
                                          12 bits
                     x delta i
                                          12 bits
                     y delta i
     }
25
           Compound Composition Packet
      Compound_composition_packet{
                                          16 bits
           ObjectID
                                           30 bits
           PTS
           LTS
                                           28 bits
30
           Composition parameters
                                           8 bits
           ObjectCount
                  (i = 0; i < ObjectCount; i++){}
         - for
                      Object composition_packet;
```

10

15

20

25

30

}

Scene Configuration Packet (SCP) is used to change reference scene width, height, to flush the buffer, and other configuration functions. The object type for SCPs is 0b00.0000. This allows for 1024 different configuration packets. The object number 0b00.0000.0000 (object ID 0X0000) is defined for use with flushing the terminal buffers.

Composition Control for Buffer Management (Object ID 0x0000)

AV terminal buffers are flushed using Flush Cache and Scene Update flags. When using hierarchical scene structure, the current scene graph is flushed and the terminal loads the new scene from the bitstream. Use of flags allows for saving the current scene structure instead of flushing it. These flags are used to update the reference scene width and height whenever a new scene begins. If the Flush Cache\_Flag is set, the cache is flushed, removing the objects (if any). If Scene Update Flag is set, there are two possibilities: (i) Flush\_Cache-Flag is set, implying that the objects in the cache will no longer be used; (ii) Flush\_Cache\_Flag is not set, the new scene being introduced (an editing action on the bitstream) splices the current scene and the objects in the scene will be used after the end of the new scene. The ETS of the objects, if any, will be frozen for the duration of the new scene introduced. beginning of the next scene is indicated by another scene configuration packet.

30

```
Scene_Update_Flag 1 bit

if (Scene_Update_Flag) {

    ref_scene_width 12 bits

    ref_scene_height 12 bits
}
```

Composition Control for Scene Description (Object ID 0x0001)

A hierarchy of nodes is defined, describing a scene. The scene configuration packets can also be used to define a scene hierarchy that allows for a description of scenes as a hierarchy of AV objects. Each node in such a graph is a grouping of nodes that groups the leaves and/or other nodes of the graph into a compound AV object. Each node (leaf) has a unique ID followed by its parameters as shown in Fig. 3.

Composition Control for Stream-Node Mapping (Object ID 0x0002)

As illustrated by Fig. 4, table entries

20 associate the elementary object streams in the logical channels to the nodes in a hierarchical scene. The stream IDs are unique, but not the node IDs. This implies that more than one stream can be associated with the same node.

25 <u>Composition Control for Scene Updates (Object ID</u> 0x0003)

Fig. 5 illustrates updating of the nodes in the scene hierarchy, by modifying the specific parameters of the node. The graph itself can be updated by adding/deleting the nodes in the graph. The update type in the packet indicates the type of update to be performed on the graph.

# - Architectural Embodiment

The embodiment described below includes an

10

15

20

25

30

WO 98/36559 PCT/US98/02668

object-based AV bitstream and a terminal architecture. The bitstream design specifies, in a binary format, how AV objects are represented and how they are to be composed. The AV terminal structure specifies how to decode and display the objects in the binary bitstream.

#### AV Terminal Architecture

Further to Fig. 1 and with specific reference to Fig. 6, the input to the de-multiplexer 1 is an object-based bitstream such as an MPEG-4 bitstream, consisting of AV objects and their composition information multiplexed into logical channels (LC). The composition of objects in a scene can be specified as a collection of objects with independent composition specification, or as a hierarchical scene graph. The composition and control information is included in LCO. The control information includes control commands for updating scene graphs, reset decoder buffers etc. Logical channels 1 and above contain object date. The system includes a controller (or "executive") 2 which controls the operation of the AV terminal.

The terminal further includes input buffers 3, AV object decoders 4, buffers 4' for decoded data, a composer 5, a display 6, and an object cache 7. The input bitstream may be read from a network connection or from a local storage device such as a DVD, CD-ROM or computer hard disk. LCO containing the composition information is fed to the controller. The DMUX stores the objects in LC1 and above at the location in the buffer specified by the controller. In the case of network delivery, the encoder and the stream server cooperate to ensure that the input object buffers neither overflow nor underflow. The encoded data objects are stored in the input data buffers until read by the decoders at their decoding time, typically given by an

10

15

20

25

30

WO 98/36559 PCT/US98/02668

associated decoding timestamp. Before writing a data object to the buffer, the DMUX removes the timestamps and other headers from the object data packet and passes them to the controller for signaling of the appropriate decoders and input buffers. The decoders, when signaled by the controller, decode the data in the input buffers and store them in the decoder output buffers. The AV terminal also handles external input such as user interaction.

In the object cache 7, objects are stored for use beyond their initial presentation time. Such objects remain in the cache even if the associated node is deleted from the scene graph, but are removed only upon the expiration of an associated time interval called the This feature can be used in expiration time stamp. presentations where an object is used repeatedly over a The composition associated with such objects can be updated with appropriate update messages. example, the logo of the broadcasting station can be downloaded at the beginning of the presentation and the same copy can be used for repeated display throughout a session. Subsequent composition updates can change the position of the logo on the display. Objects that are reused beyond their first presentation time may be called persistent objects.

#### System Controller(SC)

The system controller controls decoding and playback of bitstreams on the AV terminal. At startup, from user interaction or by looking for a session at default network address, the SC first initializes the DMUX to read from a local storage device or a network port. The control logic is loaded into the program RAM at the time of initialization. The instruction decoder reads the instructions from the program and executes

10

15

20

25

30

WO 98/36559 PCT/US98/02668

them. Execution may involve reading the data from the input buffers (composition or external data), initializing the object timers, loading or updating the object tables to the data RAM, loading object timers, or control signaling.

Fig. 7 shows the system controller in further detail. The DMUX reads the input bitstream and feeds the composition data on LCO to the controller. composition data begins with the description of the first scene in the AV presentation. This scene can be described as a hierarchical collection of objects using compound composition packets, or as a collection of independent object composition packets. A table that associates the elementary streams with the nodes in the scene description immediately follows the scene description. The controller loads the object IDs (stream IDs) into object list and render list which are maintained in the data RAM. The render list contains the list of objects that are to be rendered on the display device. An object that is disenabled by user interaction is removed from the render list. A node delete command that is sent via a composition control packet causes the deletion of the corresponding object IDs from the object The node hierarchy is also maintained in the data RAM and updated whenever a composition update is received.

The composition decoder reads data from the composition and external data buffer and converts them into a format understood by the instruction decoder. The external input includes user interaction to select objects, disenable and enable objects and certain predefined operations on the objects. During the execution of the program, two lists are formed in the data RAM. The object list, containing a list of objects

15

20

25

30

WO 98/36559 PCT/US98/02668

(object IDs) currently handled by the decoders and a render list, containing the list of active objects in the scene. These lists are updated dynamically as the composition information is received. For example, if a user chooses to hide an object by passing a command via the external input, the object is removed from the render list until specified by the user. This is also how external input is handled by the system. Whenever there is some external interaction, the composition decoder reads the external data buffer and performs the requested operation.

The SC also maintains timing for each AV object to signal the decoders and decoder buffers of decoding and presentation time. The timing information for the AV objects is specified in terms of its time-base. The terminal uses the system clock to convert an object's time base into system time. For objects that do not need decoding, only presentation timers are necessary. timers are loaded with the decoding and presentation timestamps for that AV object. The controller obtains the timestamps from the DMUX for each object. When a decoding timer for an object runs out, the appropriate decoder is signaled to read data from the input buffers and to start the decoding process. When a presentation timer runs out, the decoded data for that object is transferred to the frame buffer for display. A dual buffer approach could be used to allow writing to a frame buffer while the contents of the second buffer are displayed on the monitor. The instruction decoder can also reset the DMUX or input buffers by signaling a reset, which initializes them to the default state.

### Information Flow in the Controller

-. Fig. 8 shows the flow of information in the controller. To keep the figure simple, the operations

10

15

20

25

30

WO 98/36559 PCT/US98/02668

performed by the instruction decoder are shown in groups. The three groups respectively concern object property modifications, object timing, and signaling.

#### Object Property Modifications

These operations manipulate the object IDs, also called elementary stream IDs. When a scene is initially loaded, a scene graph is formed with the object IDs of the objects in the scene. The controller also forms and maintains a list of objects in the scene (object list) and active objects in the object from the render list. Other operations set and update object properties such as composition parameters when the terminal receives a composition packet.

#### Object Timing

This group of operations deals with managing object timers for synchronization, presentation, and decoding. An object's timestamp specified in terms of its object time base is converted into system time and the presentation and decoding time of that object are set. These operations also set and reset expiration timestamps for persistent objects.

### Signaling

Signaling operations control the over-all operation of the terminal. Various components of the terminal are set, reset and operated by controller signaling. The controller checks the decoding and presentation times of the objects in the render list and signals the decoders and presentation frame buffers accordingly. It also initializes the DEMUX for reading from a network or a local storage device. At the instigation of the controller, decoders read the data from the input buffers and pass the decoded data to decoder output buffers. The decoded data is moved to the presentation device when signaled by the controller.

WO 98/36559 PCT/US98/02668

#### WE CLAIM:

A method for displaying object-based audio-1

- visual/video data, comprising: 2
- (a) receiving, over time, a plurality of audio-3
- visual/video objects and composition information for the 4
- objects; 5
- 6 (b) storing in a cache memory at least one of
- 7 the objects;
- 8 (c) composing scenes from said objects
- including the one of the objects stored in the cache 9
- memory; and 10
- (d) displaying the composed scenes. 11
  - The method of claim 1, further comprising, in 1
  - addition to storing the one of the objects, storing 2
  - expiration time data for the one of the objects. 3
  - The method of claim 1, with at least one of the 1
  - 2 objects being received from a network connection.
  - The method of claim 1, with at least one of the 1
  - 2 objects being received from local memory.
  - 1 The method of claim 1, with at least one of the
  - objects being received from local memory and at least one
  - other of the objects being received from a network 3
  - connection, and with the composed scenes comprising the 4
  - one and the other of the objects. 5
  - 1 The method of claim 1, further comprising
  - 2 responding to interactive user input.
  - The method of claim 6, wherein responding 1 7.

- 2 comprises at least one of selecting, enabling and
- 3 disenabling one of the objects.
- 1 8. Apparatus for displaying object-based audio-
- visual/video data, comprising:
- 3 (a) a controller circuit for controlling
- 4 acquisition over time of a plurality of audio-
- 5 visual/video objects and composition information for the
- 6 objects;
- 7 (b) a cache memory for storing at least one of
- 8 the objects;
- 9 (c) a composer circuit, coupled to the cache
- 10 memory, for composing scenes from said video objects
- including the one of the objects stored in the cache
- 12 memory; and
- (d) a display for the composed scene.
  - 9. Apparatus for displaying object-based audio-
  - visual/video data, comprising a processor which is
  - 3 instructed for:
  - 4 (a) controlling acquisition over time of a
  - 5 plurality of audio-visual/video objects and composition
  - 6 information for the objects;
  - 7 (b) storing in a cache memory at least one of
  - 8 the objects;
  - 9 (c) composing scenes from said video objects
- 10 including the one of the objects stored in the cache
- 11 memory; and
- 12 (d) displaying the composed scenes.
  - 1 10. Apparatus for displaying object-based audio-
  - visual/video data, comprising:
  - 3 -. (a) means for controlling acquisition over
  - 4 time of a plurality of audio-visual/video objects and

WO 98/36559 PCT/US98/02668

5	composition information for the objects;
6	(b) means for for storing in a cache memory at
7	least one of the objects;
8	(c) means, coupled to the cache memory, for
9	composing scenes from said video objects including the
10	one of the objects stored in the cache memory; and
11	(d) means for displaying the scene.

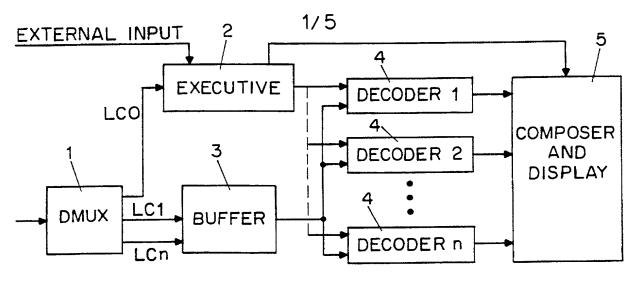


FIG. 1

OBJECT ID	
DTS	
PTS	
LTS	
OCR	
COMPOSITION PARAMETERS	

FIG. 2a

OBJECT ID			
CI-PI			
PRIORITY			
ETS			
VOP TYPE (I, P,B)			
OBJECT DATA			

FIG. 2b

COMP. OBJECT ID
PTS
LTS
OBJECT COUNT
COMPOSITION PARAMETERS
OBJECT ID
DTS
OCR
COMPOSITION PARAMETERS

OBJECT ID	]
DTS	
OCR	
COMPOSITION PARAMETERS	

FIG. 2c

Child node (CN) Child node (CN) No. children Node param Root node (RN) Comp Obj ID (0X0001) Node param Node ID

Stream ID Node ID Stream ID Table size Comp Obj (0X0002)

2/5

Node ID

Node ID Update type (0x00-delete Comp Obj (OXOOO3)|Update type (OxOI-add) Comp Obj (0X0003)


Node

Parent Node ID

Param index Value Comp Obj (OXOOO3) |Update type (OxOO-modify|Node ID|No. Param|Param index|Value|

Ŋ

SUBSTITUTE SHEET (RULE 26)

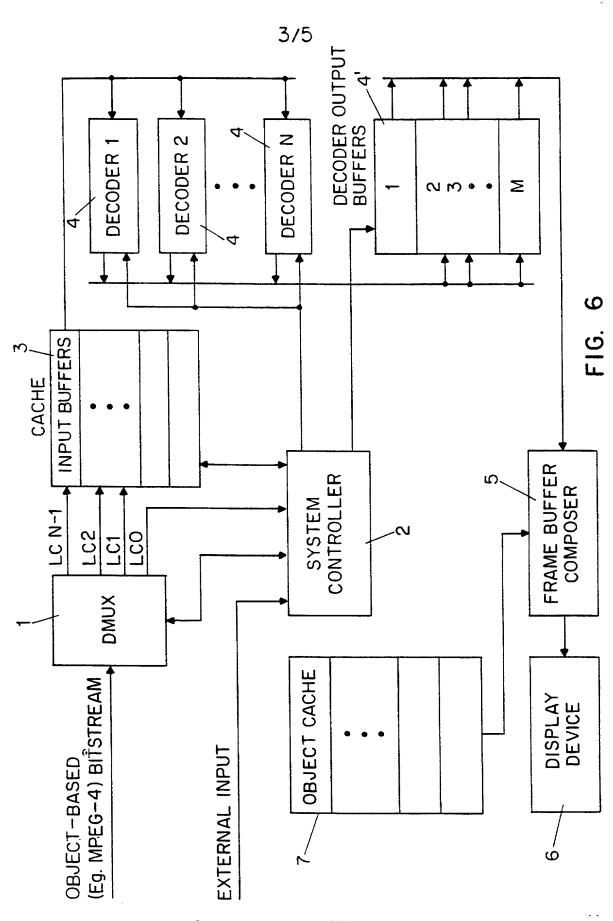

**SUBSTITUTE SHEET (RULE 26)** 

(24 h

4/5 COMPOSITION DATA BUFFER


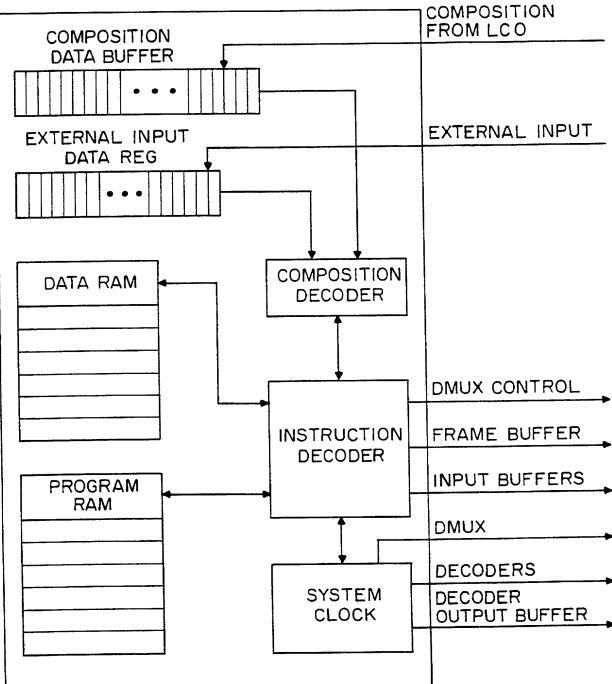


FIG. 7

5/5

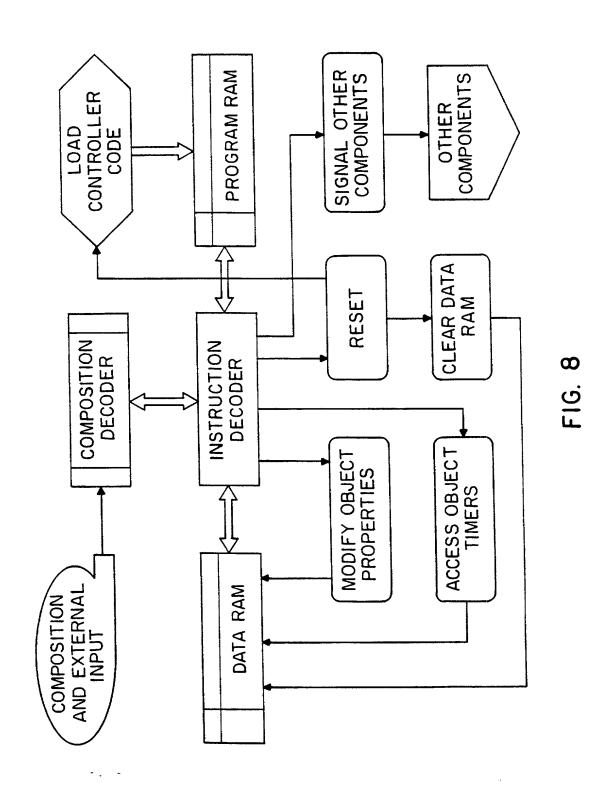

BAKER & BOTTS, L.L.P.

FILE NO.: A30919 PCT USA

# **COMBINED DECLARATION** AND POWER OF ATTORNEY

ign, National Stage of PCT, Divisional, Continuation or C-I-P Application)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

#### OBJECT-BASED AUDIO-VISUAL TERMINAL AND BITSTREAM STRUCTURE

This declaration is of the following type:

[]	original
[]	design
[X]	national stage of PCT
	divisional
	continuation
	continuation-in-part (C-I-P)
4 = 1000 1	
he specification	on of which: (complete (a), (b), or (c))
क <del>्रीचा</del> हिं ६ हैं	
(a) [] is attac	
(b) [X] was f	iled on August 13, 1999 as Application Serial No. 09/367,433 and was amended on (if
applicable).	
(È) [X] was d	lescribed and claimed in PCT International Application No. PCT/US98/02668 filed on
February 13, 1	998 and was amended on <i>(if applicable)</i> .

# Acknowledgement of Review of Papers and Duty of Candor

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the subject matter claimed in this application in accordance with Title 37, Code of Federal Regulations § 1.56.

[] In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.98.

# **Priority Claim**

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT International Application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International Application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application on which priority is claimed

(complete (d) or (e))

- (d) [X] no such applications have been filed.
- (e) [] such applications have been filed as follows:

BAKER & BOTTS, L.L.P.

FILE NO.: A30919 PCT USA

COUNTRY	APPLICATION NO.	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
				[] YES NO []
				[] YES NO []
				[]YES NO []
L FOREIGN AP	PLICATION[S], IF ANY, FILED MORE THAN	1 12 MONTHS (6 MONTHS FOR DESIGN) PRI	OR TO SAID APPLICATION	
				[]YES NO []
				[]YES NO []
				[] YES NO []

# Claim for Benefit of Prior U.S. Provisional Application(s)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Provisional Application Number	Filing Date
60/037,779	February 14, 1997
dame.	

# Claim for Benefit of Earlier U.S./PCT Application(s) under 35 U.S.C. 120

(complete this part only if this is a divisional, continuation or C-I-P application)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)	
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)	

# Power of Attorney

As a named inventor, I hereby appoint Dana M. Raymond, Reg. No. 18,540; Frederick C. Carver, Reg. No. 17,021; Francis J. Hone, Reg. No. 18,662; Joseph D. Garon, Reg. No. 20,420; Arthur S. Tenser, Reg. No. 18,839; Ronald B. Hildreth, Reg. No. 19,498; Thomas R. Nesbitt, Jr., Reg. No. 22,075; Robert Neuner, Reg. No. 24,316; Richard G. Berkley, Reg. No. 25,465; Richard S. Clark, Reg. No. 26,154; Bradley B. Geist, Reg. No. 27,551; James J. Maune, Reg. No. 26,946; John D. Murnane, Reg. No. 29,836; Henry Tang, Reg. No. 29,705; Robert C. Scheinfeld, Reg. No. 31,300; John A. Fogarty, Jr., Reg. No. 22,348; Louis S. Sorell, Reg. No. 32,439; Rochelle K. Seide Reg. No. 32,300; Gary M. Butter, Reg. No. 33,841; Marta E. Delsignore, Reg. No. 32,689; and Lisa B. Kole, Reg. No. 35,225 of the firm of BAKER & BOTTS, L.L.P., with offices at 30 Rockefeller Plaza, New York, New York 10112, as attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

SEND CORRESPONDENCE TO: BAKER & BOTTS, L.L.P. 30 ROCKEFELLER PLAZA, NEW YORK, N.Y. 10112 CUSTOMER NUMBER: 21003	DIRECT TELEPHONE CALLS TO:  BAKER & BOTTS, L.L.P.  (212) 705-5000
---	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE	LAST NAME (—C'C	FIRST NAME	MIDDLE NAME			
OR FIRST INVENTOR	Eleftheriadis	Alexandros_				
RESIDENCE & CITIZENSHIP	CITY	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZEN	SHIP		
	New York / Y	New York	Greece			
POST OFFICE	POST OFFICE ADDRESS	CITY	STATE or COUNTRY	STATE or COUNTRY ZIP CODE		
ADDRESS	Dept. of Electrical Engineering,	New York	New York	10027		
•	Columbia University					
DATE 1	SIGNATURE OF EXPERIOR			J		
DATE	SIGNATURE OF THE PARTY OF THE P					
· / · · · · · · · · · · · · · · · · · ·	LAST NAME   MIDDLE NAME					
FULL NAME OF SECOND JOINT INVENTOR, IF ANY		Hari	MEDEL I WALL			
	Kalva	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP			
RESIDENCE & CITIZENSHIP	CITY					
	New York	New York	India			
POST OFFICE	POST OFFICE ADDRESS \	CITY	STATE or COUNTRY	ZIP CODE		
ÅÐDRESS ∤∐	Dept. of Electrical Engineering,	New York	New York	10027		
	Columbia University			<u> </u>		
DATE	SIGNATURE OF INVENTOR					
Dec 28 40	E.A.					
FULL NAME OF THIRD	LAST NAME	FIRST NAME	MIDDLE NAME			
IONT INVENTOR, IF ANY						
RESIDENCE & CITIZENSHIP	CITY	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZEN	SHIP		
#						
POST OFFICE	POST OFFICE ADDRESS	CITY	STATE or COUNTRY	ZIP CODE		
	Tobi cirrob abbidos					
ĎĀTE	SIGNATURE OF INVENTOR					
DATE	SIGNATURE OF INVENTOR					
Tang	LAST NAME	FIRST NAME	MIDDLE NAME			
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY	LASI NAME	FIRST NAME	WIDDEE WANTE			
		STATE of FOREIGN COUNTRY COUNTRY OF CITIZENSHIP				
RESIDENCE & CITIZENSHIP	CITY	STATE OF FOREIGN COUNTRY	COUNTRY OF CITIZEN	IZENSHIF		
			· ·			
		Cymy	GTATE - COVENTRY	ZIR CODE		
POST OFFICE	POST OFFICE ADDRESS	CITY	STATE or COUNTRY	ZIP CODE		
POST OFFICE ADDRESS		CITY	STATE or COUNTRY	ZIP CODE		
POST OFFICE	POST OFFICE ADDRESS SIGNATURE OF INVENTOR	CITY	STATE or COUNTRY	ZIP CODE		
POST OFFICE ADDRESS				ZIP CODE		
POST OFFICE ADDRESS DATE FULL NAME OF FIFTH		CITY FIRST NAME	STATE or COUNTRY  MIDDLE NAME	ZIP CODE		
POST OFFICE ADDRESS DATE FULL NAME OF FIFTH	SIGNATURE OF INVENTOR			ZIP CODE		
POST OFFICE ADDRESS DATE FULL NAME OF FIFTH	SIGNATURE OF INVENTOR					
POST OFFICE ADDRESS DATE FULL NAME OF FIFTH JOINT INVENTOR, IF ANY	SIGNATURE OF INVENTOR  LAST NAME	FIRST NAME	MIDDLE NAME			
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY RESIDENCE & CITIZENSHIP  POST OFFICE	SIGNATURE OF INVENTOR  LAST NAME	FIRST NAME	MIDDLE NAME			
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP	SIGNATURE OF INVENTOR  LAST NAME  CITY	FIRST NAME  STATE of FOREIGN COUNTRY	MIDDLE NAME  COUNTRY OF CITIZEN	SHIP		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS	SIGNATURE OF INVENTOR  LAST NAME  CITY	FIRST NAME  STATE of FOREIGN COUNTRY	MIDDLE NAME  COUNTRY OF CITIZEN	SHIP		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS	SIGNATURE OF INVENTOR  LAST NAME  CITY  POST OFFICE ADDRESS	FIRST NAME  STATE of FOREIGN COUNTRY	MIDDLE NAME  COUNTRY OF CITIZEN	SHIP		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS	SIGNATURE OF INVENTOR  LAST NAME  CITY  POST OFFICE ADDRESS	FIRST NAME  STATE of FOREIGN COUNTRY	MIDDLE NAME  COUNTRY OF CITIZEN	SHIP		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS  DATE	SIGNATURE OF INVENTOR  LAST NAME  CITY  POST OFFICE ADDRESS  SIGNATURE OF INVENTOR	FIRST NAME  STATE or FOREIGN COUNTRY  CITY	MIDDLE NAME  COUNTRY OF CITIZEN  STATE or COUNTRY	SHIP		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS  DATE  FULL NAME OF SIXTH JOINT INVENTOR, IF ANY	SIGNATURE OF INVENTOR  LAST NAME  CITY  POST OFFICE ADDRESS  SIGNATURE OF INVENTOR  LAST NAME	FIRST NAME  STATE or FOREIGN COUNTRY  CITY	MIDDLE NAME  COUNTRY OF CITIZEN  STATE or COUNTRY	SHIP ZIP CODE		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS  DATE  FULL NAME OF SIXTH	SIGNATURE OF INVENTOR  LAST NAME  CITY  POST OFFICE ADDRESS  SIGNATURE OF INVENTOR	FIRST NAME  STATE or FOREIGN COUNTRY  CITY  FIRST NAME	MIDDLE NAME  COUNTRY OF CITIZEN  STATE or COUNTRY  MIDDLE NAME	SHIP ZIP CODE		
POST OFFICE ADDRESS  DATE  FULL NAME OF FIFTH JOINT INVENTOR, IF ANY  RESIDENCE & CITIZENSHIP  POST OFFICE ADDRESS  DATE  FULL NAME OF SIXTH JOINT INVENTOR, IF ANY	SIGNATURE OF INVENTOR  LAST NAME  CITY  POST OFFICE ADDRESS  SIGNATURE OF INVENTOR  LAST NAME	FIRST NAME  STATE or FOREIGN COUNTRY  CITY  FIRST NAME	MIDDLE NAME  COUNTRY OF CITIZEN  STATE or COUNTRY  MIDDLE NAME	SHIP ZIP CODE		